


Shaft Surface Hardness: 70 HRC
 Core Hardness: 40 - 45 HRC
 Head Hardness: 50 HRC

Shaft Fine Ground and Nitrided
 Max. Working Temperature of 650°C

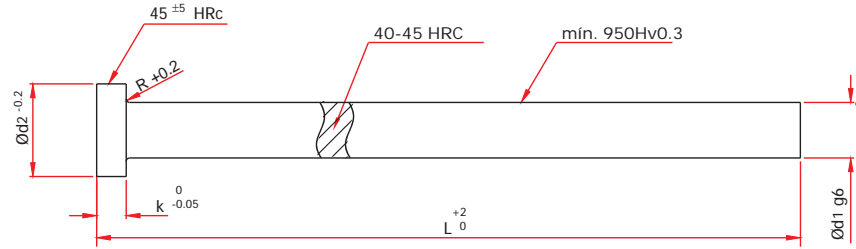

d1 (g6)	d2 -0.2	K -0.05	r	L (+2)											
				100	125	160	200	250	315	400	500	630	800	1000	
1.5	3	1.5	0.2	x	x	x	x								
2	4	2	0.2	x	x	x	x	x	x						
2.2	4	2	0.2	x	x	x	x	x	x						
2.5	5	2	0.3	x	x	x	x	x	x						
2.7	5	2	0.3	x	x	x	x	x	x						
3	6	3	0.3	x	x	x	x	x	x	x	x				
3.2	6	3	0.3	x	x	x	x	x	x	x					
3.5	7	3	0.3	x	x	x	x	x	x	x					
3.7	7	3	0.3	x	x	x	x	x	x	x					
4	8	3	0.3	x	x	x	x	x	x	x	x	x			
4.2	8	3	0.3	x	x	x	x	x	x	x					
4.5	8	3	0.3	x	x	x	x	x	x	x					
5	10	3	0.3	x	x	x	x	x	x	x	x	x	x	x	
5.2	10	3	0.3	x	x	x	x	x	x	x	x				
5.5	10	3	0.3	x	x	x	x	x	x	x	x				
6	12	5	0.5	x	x	x	x	x	x	x	x	x	x	x	
6.2	12	5	0.5	x	x	x	x	x	x	x	x				
6.5	12	5	0.5	x	x	x	x	x	x	x	x				
7	12	5	0.5	x	x	x	x	x	x	x	x				
8	14	5	0.5	x	x	x	x	x	x	x	x	x	x	x	
8.2	14	5	0.5	x	x	x	x	x	x	x	x	x			
8.5	14	5	0.5	x	x	x	x	x	x	x	x	x			
9	14	5	0.5	x	x	x	x	x	x	x	x	x			
10	16	5	0.5	x	x	x	x	x	x	x	x	x	x	x	
10.2	16	5	0.5	x	x	x	x	x	x	x	x	x			
10.5	16	5	0.5	x	x	x	x	x	x	x	x	x			
11	16	5	0.5	x	x	x	x	x	x	x	x	x			
12	20	7	0.8	x	x	x	x	x	x	x	x	x	x	x	
12.2	20	7	0.8	x	x	x	x	x	x	x	x	x			
12.5	20	7	0.8	x	x	x	x	x	x	x	x	x			
14	22	7	0.8	x	x	x	x	x	x	x	x	x	x	x	
16	22	7	0.8	x	x	x	x	x	x	x	x	x	x	x	
18	24	7	0.8	x	x	x	x	x	x	x	x	x	x	x	
20	26	8	1	x	x	x	x	x	x	x	x	x	x	x	
25	32	10	1					x	x	x	x	x	x	x	
32	40	10	1					x	x	x	x	x	x	x	
40	50	10	1					x	x	x	x	x	x	x	

Order format : A / d1 x L
 Example : A / 1.5 x 160