


Through Hardened and Fine Ground
Max. Working Temperature of 220°C

Shaft Hardness: 60 +/-2 HRC
Head Hardness: 45 +/-5 HRC

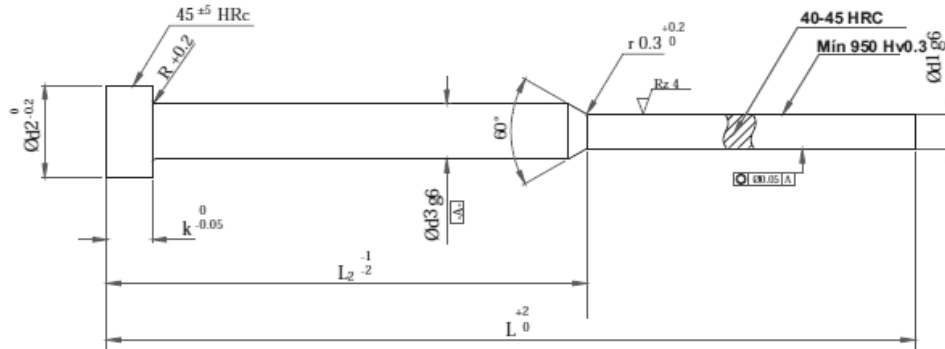

| d1 (g6) | d3 (g6) | d2 -0.2 | k -0.05 | r | L (+2) | | | | | |
|------------|------------|------------|------------|-----|------------------|-----|-----|-------|-------|-----|
| | | | | | 80 | 100 | 125 | 160 | 200 | 250 |
| | | | | | L2 (-1.0 / -2.0) | | | | | |
| | | | | | 32 | 50 | 50 | 63/75 | 75/80 | 100 |
| 0.8 | 2 | 4 | 2 | 0.2 | X | X | X | X | X | X |
| 0.9 | 2 | 4 | 2 | 0.2 | X | X | X | X | X | X |
| 1 | 2 | 4 | 2 | 0.2 | X | X | X | X | X | X |
| 1.2 | 2 | 4 | 2 | 0.2 | X | X | X | X | X | X |
| 1.4 | 2 | 4 | 2 | 0.2 | X | X | X | X | X | X |
| 1.5 | 3 | 6 | 3 | 0.3 | X | X | X | X | X | X |
| 1.6 | 3 | 6 | 3 | 0.3 | X | X | X | X | X | X |
| 1.7 | 3 | 6 | 3 | 0.3 | X | X | X | X | X | X |
| 1.8 | 3 | 6 | 3 | 0.3 | X | X | X | X | X | X |
| 2 | 3 | 6 | 3 | 0.3 | X | X | X | X | X | X |
| 2.2 | 3 | 6 | 3 | 0.3 | X | X | X | X | X | X |
| 2.5 | 3 | 6 | 3 | 0.3 | | X | X | X | X | X |

Order format: CH / d1 x L2 x L
Example: CH / 1.2 x 50 x 125