

M 420 Stainless Steel **H** 50-54 HRC
 Note: All dimensions are in millimeters.

D Nominal Ring Diameter	L	C	A	L2	B From Graphic Below	P
4	8	2.2	2.0	8	1.4	M1x0.25
5	8	3.1	2.0	8	2	M1.6x0.20
6	8	3.1	2.0	8	2	M1.6x0.20
8	10	4.4	2.5	10	3	M2.3x0.25
10	12	5.2	3.0	12	3	M2.5x0.35
12	14	6.2	3.0	14	4	M3x0.35
16	14	8.2	3.5	14	5	M4x0.35
20	16	11.0	4.5	16	5	M4x0.35

Engraving Depth:
 Numbers: .2mm (.007")
 Arrows: .4mm (.015")

► CAD insertion point

To Order: Specify catalog number as shown below for the different style rings and plugs.

Ring Styles: Recessed Lettering



Months
 Cat #: DC-Diam
 Ex.: DC05
 Note:



A - M
 Cat #: DCA-Diam
 Ex.: DCA05



Years
 Cat #: DCY-Diam - Starting Year
 Ex.: DCY05-12
 Note: The DCY04 only has 4 years.



N - Z
 Cat #: DCZ-Diam
 Ex.: DCZ05



Days
 Cat #: DCL-Diam
 Ex.: DCL05
 Note: The DCL04 does not have tick marks.




0 - 9
 Cat #: DCN-Diam
 Ex.: DCN05



Blank
 Cat #: DC-Diam - B
 Ex.: DC05-B

Installation Guidelines:

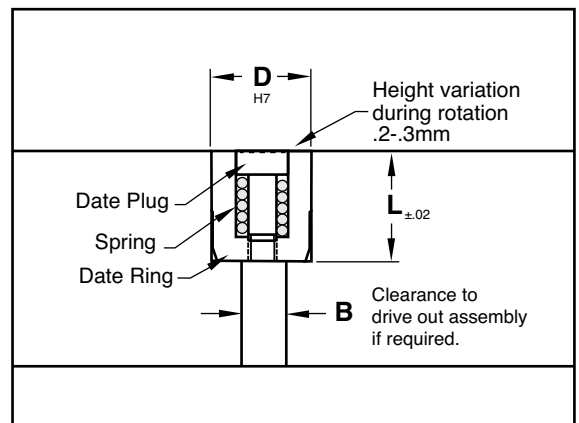

Maximum mold temperature: 285° F (140° C)

Plug Styles: Recessed Lettering



Year
 Cat #: DCP-Diam - Year
 Ex.: DCP05-12



Arrow Only
 Cat #: DCP-Diam - AO
 Ex.: DCP05-AO



C
 Cat #: DCP-Diam - C
 Ex.: DCP05-C

Special configurations are available. Contact Customer Service for more information.

* Where years are specified, any year can be ordered by changing the suffix.
 Example DCP05-13 or DCY05-14.

Plugs include springs and replacements are available.

European dater delivery in 2 weeks maximum,
 with shorter deliveries subject to availability.