

M 1.4034 **H** 54-58 HRC

Note: All dimensions are in millimeters.

| D Nominal Ring Diameter | L | M | T | C | Slot Depth | P | Engraving Depth | |
|----------------------------------|----|-----------|---|------|---------------|-----------|-----------------|-------|
| | | | | | | | Ring | Plugs |
| 6 | 17 | M3 x 0.5 | 3 | 4.2 | 0.4 | M1.6x0.2 | 0.10 | 0.10 |
| 8 | 20 | M4 x 0.7 | 4 | 5.8 | 0.4 | M2.5x0.35 | 0.12 | 0.10 |
| 10 | 20 | M5 x 0.8 | 4 | 7.0 | 0.4 | M2.5x0.35 | 0.13 | 0.10 |
| 12 | 25 | M6 x 1.0 | 6 | 8.5 | 0.6 | M3.0x0.5 | 0.20 | 0.20 |
| 16 | 33 | M8 x 1.25 | 8 | 11.5 | 0.6 | M3.0x0.6 | 0.25 | 0.25 |

► CAD insertion point

To Order: Specify catalog number as shown below for the different style rings and plugs.

Ring Styles: Recessed Lettering



Months

Cat #: DMD-Diam
Ex.: DMD06



Days

Cat #: DMDL-Diam
Ex.: DMDL06



Weeks

Cat #: DMDW-Diam
Ex.: DMDW06

Plug Styles: Recessed Lettering



Year & Months

Cat #: DMDP-Diam - Year*
Ex.: DMDP06-12



Arrow & 5 years


Cat #: DMDP-Diam - Starting Year* - 5
Ex.: DMDP06-125



Arrow & 11 years

Cat #: DMDP-Diam - Starting Year* - 11
Ex.: DMDP06-1211

Installation Guidelines:

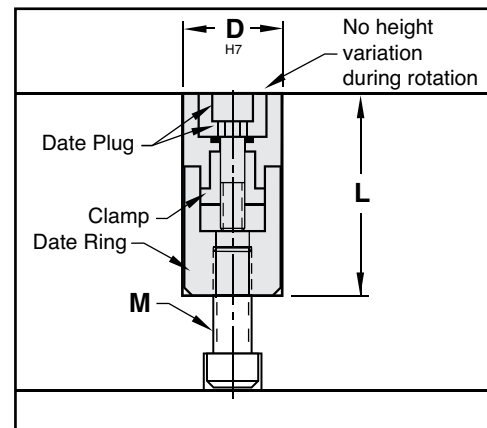

Maximum mold temperature: 450° F (230° C)

Special configurations are available. Contact Customer Service for more information.

* Where years are specified, any year can be ordered by changing the suffix. Example DMDP10-13 or DMDP06-14.

European dater delivery in 2 weeks maximum, with shorter deliveries subject to availability.