


REF	Slide retainer							Retainer pockets in mold										Max. slide weight (kg)
	A	B	C	D	E	F*	S	G	H	I	J	K	L	M	N	P	R	
MRT-10M	38	19	16	22	16	9,1	5	19	26	25	17	8	8	M5	6	6	15,5	10
MRT-20M	54	32	20	33	21	12,7	6	24	36	36	21	10	10	M6	8	8,5	20,5	20
MRT-40M	86	45	30	53	53	20,3	10	36	56	56	31	12	13	M8	10	10	25,0	40

* The distance from the center of the dowel pin to the center of the stripper bolt is critical


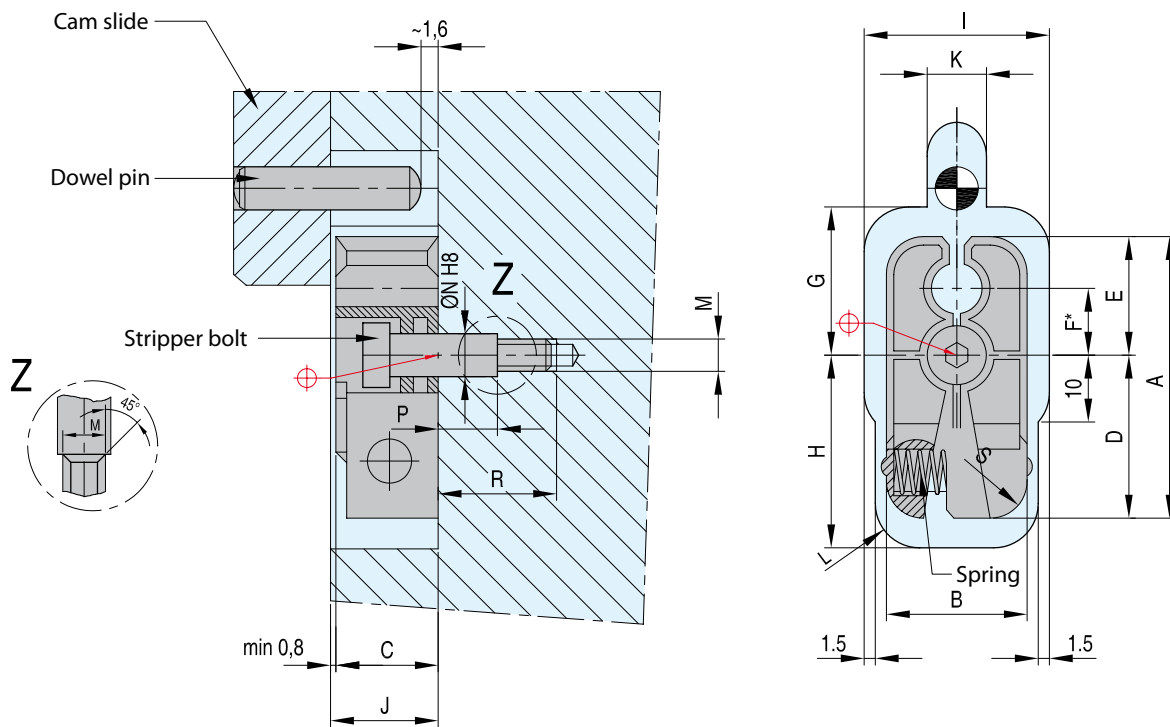


Replacement parts		
Dowel pin	REF	Tightening torque for stripper bolt Nm max.
DP 6-30	PM 5x16	10
DP 8-40	PM 6x20	15
DP 10-60	PM 8x30	20

CAD reference point



DME Slide Retainers provide a compact and economical means of slide retention which obsoletes the cumbersome external spring or hydraulic methods. Interference with machine tie bars or safety gates is no longer a problem.

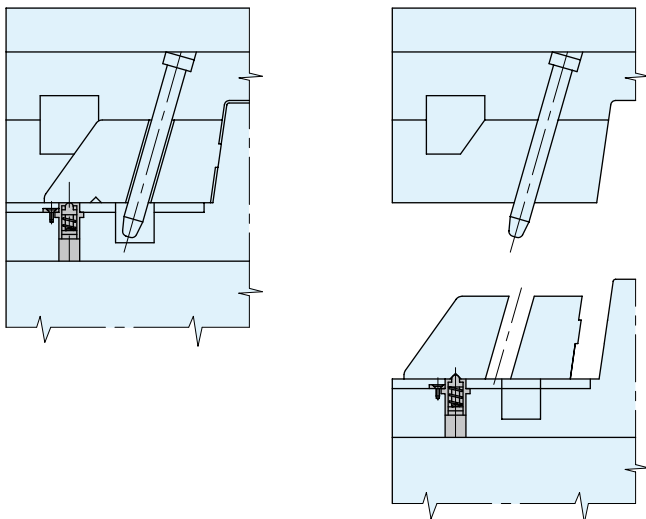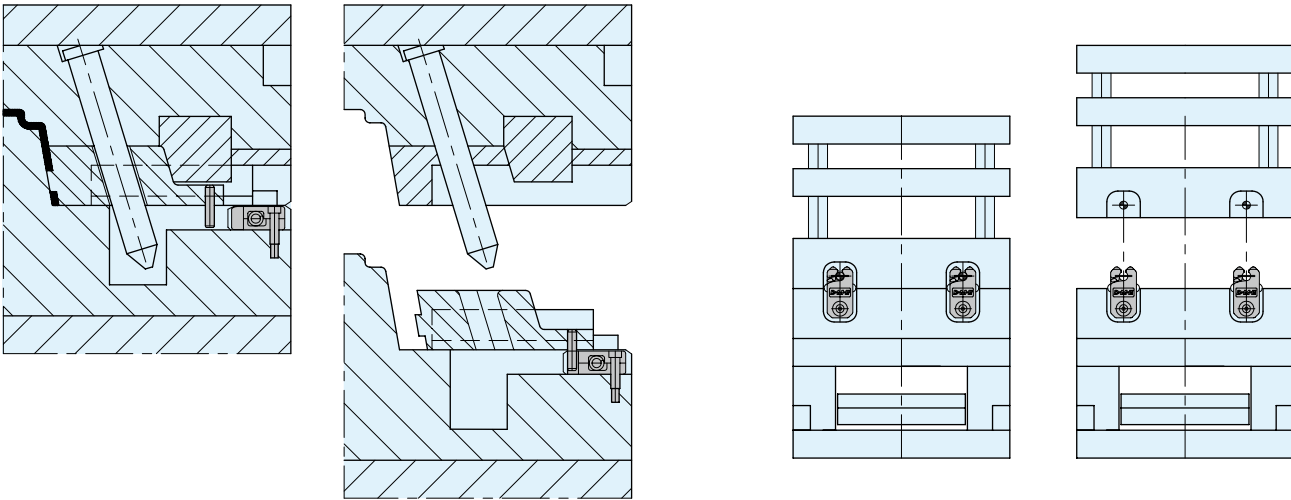

Available in three sizes with increasing weight holding capacities, the Slide Retainers can be used individually or in multiples for larger or heavier slides.

3 types to choose from:

1. **MRT:** the dowel pin installed in the slide positively locks into the retainer until disengaged by the mold's closing action. Designed with a generous lead-in at the socket opening so the dowel pin will enter the socket even if there is a slight misalignment between the retainer and the pin.
2. **PSM:** similar to MRT but spring is completely enclosed and protected from contamination.
3. **PSR:** works without dowel pin so slide can be removed without removing slide retainer. Small in size yet strong holding power.