


With Countersunk Head  
Fine Ground and Through Hardened

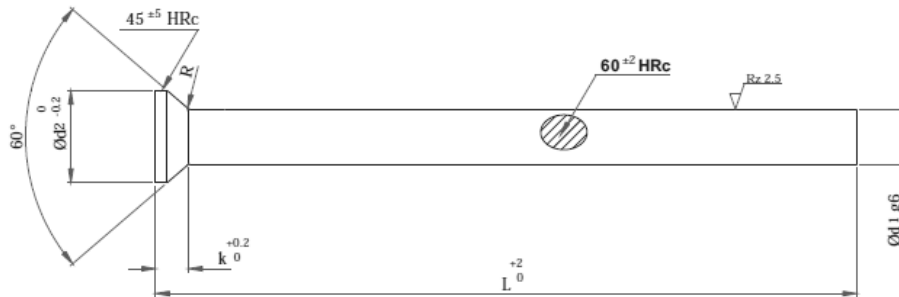

d1 (g6)	d2 (-0.2)	K (+0.2)	r	L		
				100	125	160
1	1.8	1.19	0.3	x	x	x
1.5	2.2	1.11	0.3	x	x	x
2	3	1.37	0.3	x	x	x
2.5	3.5	1.37	0.3	x	x	x
3	4.5	1.8	0.3	x	x	x
3.5	5	1.8	0.3	x	x	x
4	5.5	1.8	0.3	x	x	x
4.5	6	1.8	0.3	x	x	x
5	6.5	1.8	0.3	x	x	x
6	8	2.23	0.5	x	x	x
8	10	2.73	0.5	x	x	x

**Order format:** D / d1 x L

*Example:* D / 3.5 x 125